


ENABLED TABLE PLANTER

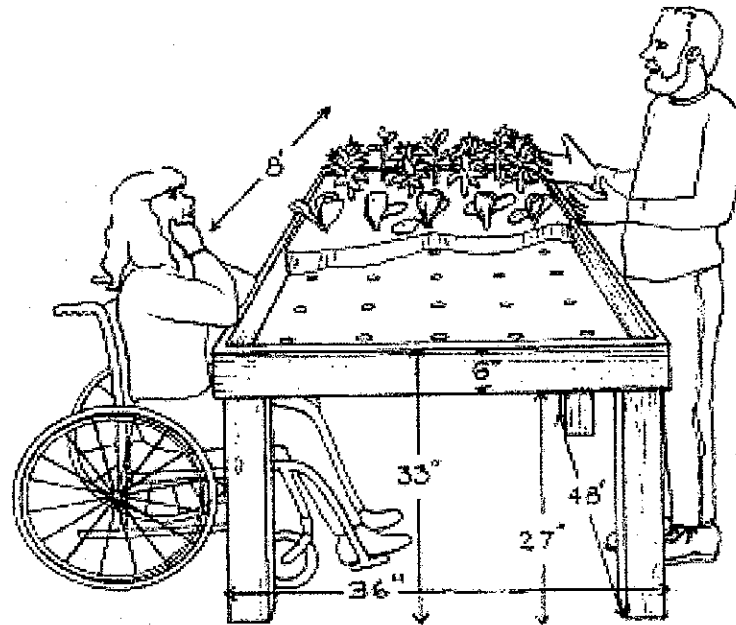

MATERIAL LIST for TABLE PLANTER

- 6 Pcs. 4" x 4" x 33" cedar for legs
- 2 Pcs. 2" x 4" x 36" cedar for box supports
- 2 Pcs. 1" x 8" x 96" cedar for box sides
- 2 Pcs. 1" x 8" x 36" cedar for box ends
- 2 Pcs. 2" x 2" x 96" cedar for box cleats
- 9 Pcs. 1" x 12" x 36" cedar for box bottom
- Large box of deck screws 2" length
- Small box of deck screws 3" length
- 10 Pcs. 1/4" x 5" carriage galvanized bolts
- 10 Pcs. 1/4" galvanized washers, nuts


TOOLS NEEDED

- Drill and 1/4" drill bit
- Tape measure
- 1/4" socket and ratchet
- Square
- Hammer
- Power screw driver
- Saw
- Level


The planter table is recommended for wheel chair user and other seated gardeners. The 27 inches allows knee clearance for gardeners using chairs to scoot underneath. The dimensions of the planting table can vary to allow for your requirements. The critical dimensions to consider in your design are adequate clearance underneath; the width of the box is no wider than you can reach across, and the planter box should be no higher than the seated gardener's rib cage. Because the depth of the planter box is shallow adequate moisture will be a problem. So, drip irrigation or frequent watering should be considered.

STEPS FOR CONSTRUCTION


The first step is to cut the support notch into 4" x 4" legs. The dimensions for the notch are 1½" wide and 5" deep.

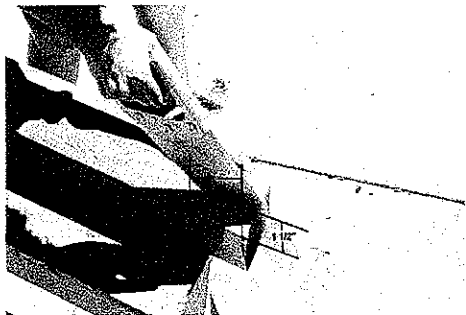


Step 2, take 2" x 4" x 36" box supports and screw to the notched out 4" x 4" legs using 3" deck screws.

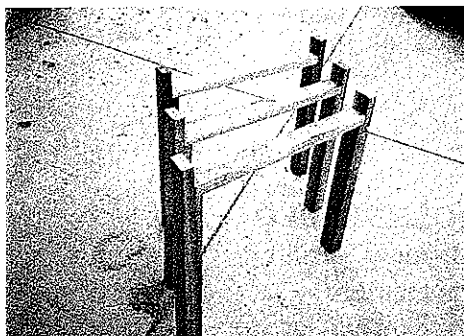


Step 3, assemble the planter box together using 2" deck screws.

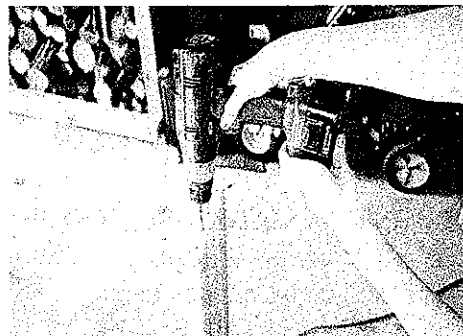

Step 4, after the box sides and ends are screwed together the bottom boards are screwed to the side and end boards using 2" decking screws.

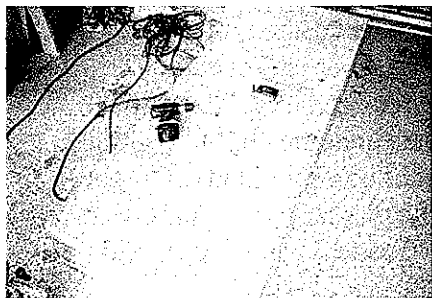


Step 5, attach the 2" x 2" x 96" box cleats to the box sides and box bottom with 2" deck screws.

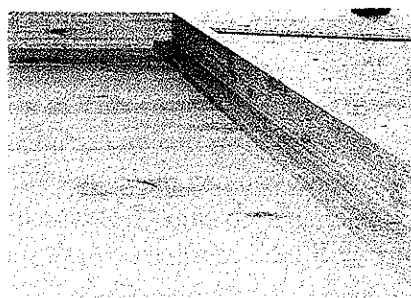

Step 6, set planter box on the leg supports. Drill $\frac{1}{4}$ " hole into the side of the leg, through the box side, and through the box cleat.



Step 7, insert carriage bolt through leg, box side, and box cleat. Place washers and nut onto bolt and tight nut down.

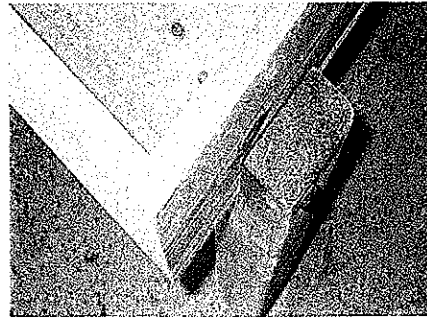

Step 8, enjoy your planter box and remember to keep those fingers dirty.

